


WGP™ Motors

Series Motor Bench Test Procedure

(Test at 12 volts ONLY)

CAUTION! Read completely!

Caution!!!!
Sparks can ignite gases emitted from batteries!

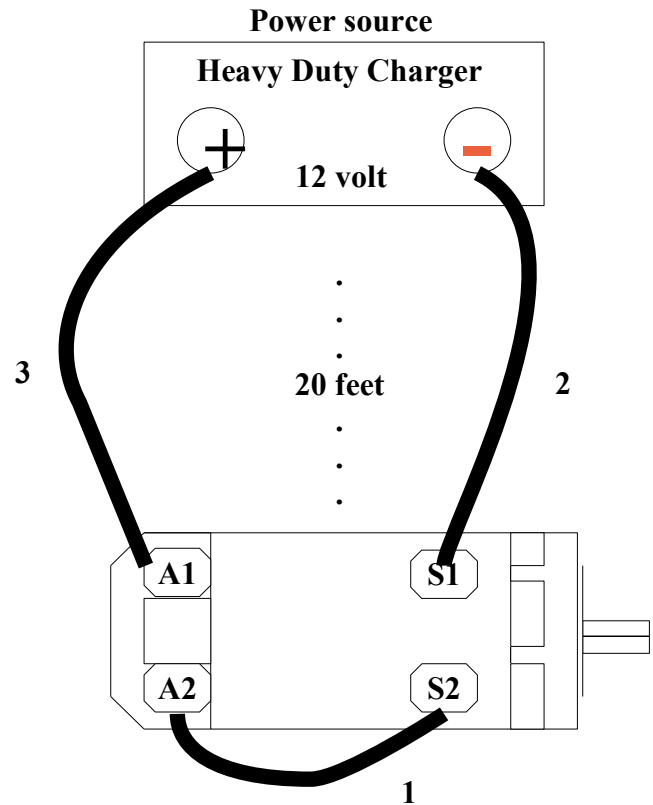

If a battery is used instead of a charger, the battery must be at least 20 feet away from the motor in a well ventilated area or preferably outside of the building!

The cables **MUST** be connected and disconnected in the order shown!

Connecting sequence:

1. Connect cable #1 and cable #2 first.
2. **Connect cable #3, to power source positive terminal (+) at the power source first, NOT at the motor.**
3. Connect the other end of cable #3 to terminal (A1) at the motor which is 20 feet away from the power source.

Disconnecting sequence:

1. Disconnect cable #1 first. (This deactivates the motor)
2. Disconnect cable #2 and then #3 from the power source.